

FEATURES AND BENEFITS

- MultiVent10™ is a ventilated roll product for metal roof ridge cap applications.
- Material is a non-woven, UV resistant, polyester fabric with an acrylic binder that allows for maximum air movement.
- Provides more air movement than polyurethane rolls coated with PVC
- Passes the extreme wind driven rain test
- Polyester vented strip has pre-applied adhesive strip
- Universal feature allows application to ridge cap.
- 200 lineal feet per box-2 each 10' strips per package/10 packages per box.




MULTIVENT10™

Universal Ridge Cap Ventilation Material




| | LENGTH PER PIECE | PIECES PER CTN. | FEET PER CTN. | WIDTH | HEIGHT |
|---|------------------|-----------------|---------------|-------|--------|
| R | 10" | 20 | 200 | 2" | 1 1/2" |
| G | 10" | 20 | 200 | 2" | 1" |


| MultiVent 10 | Non-Woven Polyester | |
|---|---------------------|-------------|
| Physical Properties | TEST METHODS | REQUIREMENT |
| Density (lb./cf) | ASTM D 3574 | 0.9 |
| 110 mph Wind Driven Rain Test | AS 100(A) | pass |
| Air Permeability (ft ³ /m./ft ² of Surface) | ASTM D737 | 1329 |
| Tear Resistance (lb./in. min.) | ASTM D 3574 | 4.5 |
| Tensile Strength (lbs/in ² min.) | ASTM D 3574 | 19 minimum |
| Compress Force Deflection (lbs/in ² @ 50%) | ASTM D 3574 | .52 |
| Elongation (% min.) | | |
| Net Free Area | | |
| Grandrib panel - 3/4" rib height (in ² /lf of Ridge) | 1 side | 9.5 |
| R panel - 1-1/4" rib height (in ² /lf of Ridge) | 1 side | 13.23 |
| Service Temperature Range | | |
| High Intermittent (oF) | | 250 |
| Continuous | | 200 |
| Cold Temperature Resistance | | -40 |
| Melt Temperature | | 500 |

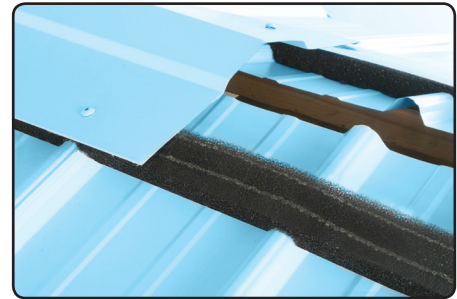

MultiVent10™ with a pre-applied adhesive strip is easily applied to the underside of a metal ridge cap for easy field installation

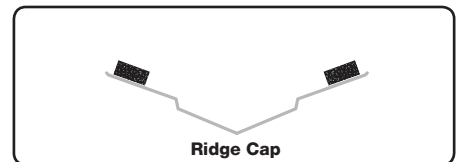

1. Roll MultiVent10™ onto ridge cap.

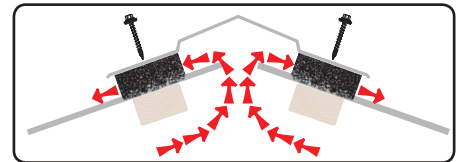

2. Fasten ridge cap to roof with Kwikseal® II Woodbinder® fasteners. MultiVent10™ will mold to roof panel profile