

FEATURES AND BENEFITS



- Polyurethane foam strip is also referred to as Universal Closures.
- The material is a flexible semi-closed cell material that is used for filling voids & other openings between metal panels.
- They are available with or without pre applied adhesive.
- Standard length is 25'.

ST PolyUrethane Strip



THICKNESS	WIDTH	LENGTH	/CARTON
1"	1"	25 FT.	10/BOX
1"	1-1/2"	25 FT.	10/BOX
1-1/2"	1-1/2"	25 FT.	10/BOX
2"	2"	25 FT.	8/BOX

ST POLYURETHANE STRIPS (UNIVERSAL CLOSURE)			
	TEST METHODS	REQUIREMENT	
Density (lb./cf)	ASTM D 3574	1.00 +/-0.1	
110 mph Wind Driven Rain Test	AS 100(A)	NA	
Air Permeability (ft3/m./ft2 of Surface)	ASTM D737	NA	
Tear Resistance (lb./in. min.)	ASTM D 3574	1.25	
Tensile Strength (lbs/in2 min.)	ASTM D 3574	10	
Compress Force Deflection (lbs/in2 @ 25%)	ASTM D 3574	30 +/-3 lbs (50 in2)	
Elongation (% min.)	ASTM D 3574	125	
Net Free Area			
Grandrib panel - 3/4" rib height (in2/lf of Ridge)	1 side	NA	
R panel - 1-1/4" rib height (in2/lf of Ridge)	1 side	NA	
Service Temperature Range			
High Intermittent (oF)		200	
Continuous		200	
Cold Temperature Resistance		-40	
Melt Temperature		465	

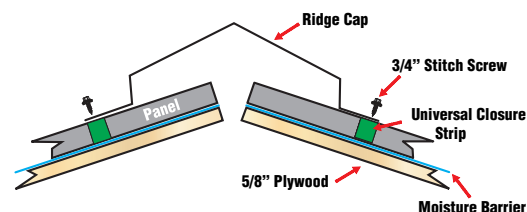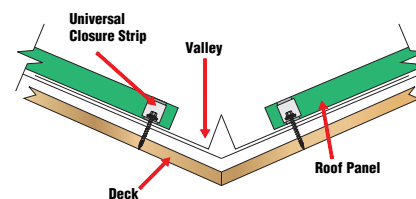

EASY INSTALLATION

<h1>STEP 1</h1>	<h3>FIT TO METAL PANEL</h3>
	
<h1>STEP 2</h1>	<h3>FIRMLY APPLY</h3>
	